

Hydrotech® Hydrodrain® AL

formerly known as Hydrodrain® AL



BUILDING TRUST




GENERAL DESCRIPTION

Hydrodrain AL is a prefabricated air layer made of a three-dimensional, crush-proof core and a non-woven, needle punched filter fabric. The filter fabric is bonded to the ridges of the core, preventing intrusion of the fabric into the flow channels during installation. The fabric extends 4" beyond the core and is bonded on one side of the core.

BASIC USE

The Hydrodrain air layer is designed to be used as the air space between the surface of DuPont Styrofoam™ insulation boards and a monolithic pour of concrete or when pavers are to be placed directly on the insulation. Hydrodrain must be covered with subsequent overburden within 10-14 days of installation.

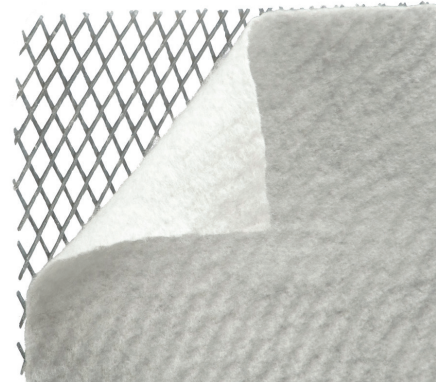

This air layer is strongly recommended by DuPont to protect the concrete and insulation from the long-term effects of trapped moisture as it goes through periodic freeze-thaw cycles.

ADVANTAGES

- Reduces the potential for spalling in concrete topping slabs due to freeze-thaw cycling of trapped moisture.
- Prevents water from becoming trapped between insulation and concrete topping (slab or pavers).

SIZES

The Hydrodrain drainage layer is available in roll form, 48 inches wide by 75 feet long. The geotextile overlaps the drainage core 4 inches on one side. Each roll covers 300 square feet and weighs 73 lb.

TECHNICAL DATA

PROPERTY	TEST METHOD	GEOTEXTILE	RESULTS
COLOR		WHITE	BLACK
THICKNESS	ASTM D1777	--	0.25 in.
COMPRESSIVE STRENGTH	ASTM D1621	--	40,000 psf
PUNCTURE	ASTM D5833	850 lb.	--
U.V. RESISTANCE	ASTM D4355	70% @ 150 hours	--
GRAB TENSILE	ASTM D4632	370 lb.	--

LEED® INFORMATION

	Credit 4	Credit 5
Recycled Content (% by weight)	100 (pc)	
Manufacture Location		Apharetta, GA
Extraction/Harvesting Location		Apharetta, GA
VOC Content (g/L)		0

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at usa.sika.com or by calling SIKA's Technical Service Department at 1-800-933-7452. Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.**

Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at <https://usa.sika.com/en/group/SikaCorp/termsandconditions.html> or by calling 1-800-933-7452.