

Hydrotech® Hydroflex® 10

formerly known as Hydroflex® 10



BUILDING TRUST




GENERAL DESCRIPTION

Hydroflex 10 is a specially formulated rubberized asphalt separation/protection sheet with synthetic fiber reinforcement.

BASIC USE

Hydroflex 10 is specifically designed to be embedded into Hydrotech's Monolithic Membrane 6125® roofing membrane to provide light protection from construction foot traffic. Hydroflex 10 also acts as the separation sheet between the insulation and roofing membrane in an IRMA roof configuration. Hydroflex 10 is not designed to provide protection from vehicular construction traffic or extreme physical abuse. Additional protection must be provided in high traffic areas or where extreme physical abuse is anticipated.

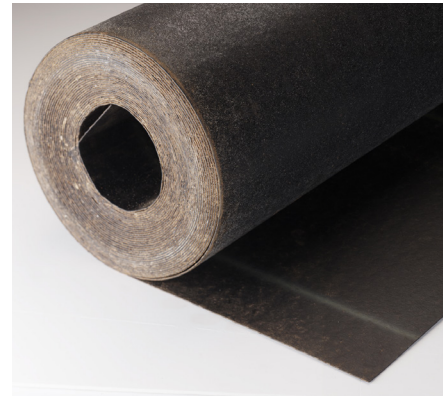

Note: Hydroflex 10 may not be installed when Hydrodrain® 300 is to be installed directly above the MM6125 membrane assembly. Hydrodrain 1000, 400, 420 or 700 are appropriate for installation directly over Hydroflex 10.

SIZES

Hydroflex 10 is available in roll form with a width of 39.37 inches and a length of 98.5 feet. One roll equals approximately 323 square feet of material, covering 300 square feet with a 3 inch lap. Each roll weighs approximately 70 pounds.

TECHNICAL DATA

PROPERTY	TEST METHOD	RESULTS
THICKNESS		0.043 in. (43mils, ±4mils)
COLOR		Black (with a light broadcast of sand)

LEED INFORMATION

	Credit 4	Credit 5
Recycled Content (% by weight)	12 (pc), 56 (pi)	
Manufacture Location	Kansas City, MO	
Extraction/Harvesting Location	32% Chicago, IL	
VOC Content (g/L)	0	

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at usa.sika.com or by calling SIKA's Technical Service Department at 1-800-933-7452. Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.**

Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at <https://usa.sika.com/en/group/SikaCorp/termsandconditions.html> or by calling 1-800-933-7452.