


WHEN PAVER SUPPORTS CAN BE PLACED AROUND THE DRAIN

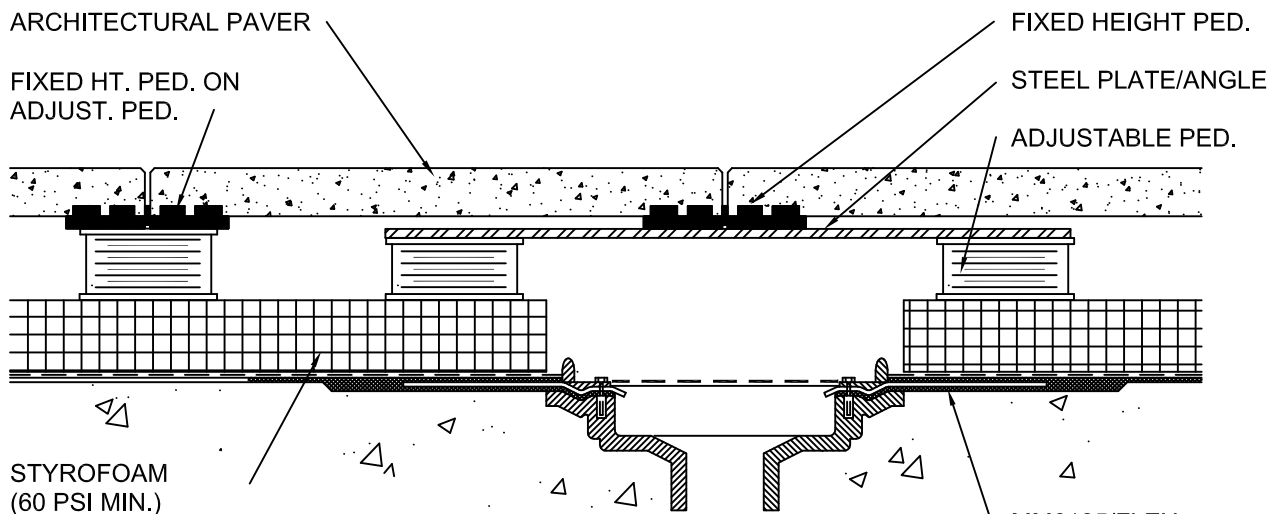

WHEN PAVER SUPPORTS LINE UP OVER DRAIN
(ref. UA-5B for isometric layout)

NOTES:

1. IF STYROFOAM INSULATION IS USED, IT MUST BE 60 PSI (COMPRESSIVE STRENGTH) BOARD MINIMUM.
2. REFER TO APPLICABLE MM6125-FR ROOFING OR WATERPROOFING GUIDELINE DETAILS FOR PROPER MEMBRANE/FLASHING DETAILS AND ALTERNATIVES
3. VARIOUS ADJUSTABLE PEDESTAL SYSTEMS ARE AVAILABLE, ALLOWING HEIGHT ADJUSTMENTS >2" - SOME HAVE INTEGRAL JOINT SPACERS, ELIMINATING THE NEED FOR FIXED HEIGHT PEDESTALS ON TOP.
4. ADJUSTMENTS FOR SLOPE CAN BE MADE IN A NUMBER OF WAYS DEPENDING UPON THE ADJUSTABLE PEDESTAL SYSTEM USED. SHIMS ARE USED FOR MINOR LEVEL ADJUSTMENTS.



**ULTIMATE
ASSEMBLY**

AMERICAN HYDROTECH, INC.

**INSTALLATION DETAIL
AT DRAINS**

SCALE: NONE
DATE: 11/06/20

UA-5A