

# MONOLITHIC MEMBRANE 7800®



A SIKA COMPANY

## Tech Data

### 1. Product Name

Monolithic Membrane 7800

### 2. Product Description

#### Basic Use

Monolithic Membrane 7800 (MM7800®) is intended for use as a waterproofing membrane on concrete structures in exterior, below-grade vertical applications such as foundation walls and tunnels. It can also see limited use in conjunction with Hydrotech's Monolithic Membrane 6125®. Please consult Hydrotech's Technical Services Department.

#### Limitations

MM7800 is not intended to be used as an exposed or traffic bearing membrane. Do not install MM7800 over lightweight concrete without prior written approval from Hydrotech. MM7800 may be applied in temperatures as low as 0° F. However, for applications below 40° F, the material may become somewhat more difficult to work with. Keeping the material warm, until just prior to use, will aid workability of the material.

#### Composition and Materials

MM7800 is a single component, trowel grade, rubberized asphalt which dries to form a tough, flexible, highly elastomeric, waterproof coating. MM7800 is fully compliant with all current V.O.C. regulations.

#### Container and Weight

MM7800 is packaged in both 5 gallon pails and 55 gallon drums. Each pail weighs approximately 45 pounds and each drum weighs approximately 475 pounds.

The weight of the installed membrane is approximately 0.35 pounds per square foot for the standard assembly and approximately 0.53 pounds for the fabric reinforced assembly.

#### Coverage

Coverage amount will vary depending on Desired thickness. Each 5 gallon pail will yield 80mils (wet film thickness) spread evenly over 100 square feet.

#### Applicable Standards

Meets or exceeds the performance requirements of ASTM D-4586.

### 3. Technical Data

Typical physical properties of MM7800 are shown in Table 1 below.

### 4. Installation

#### Surface Preparation

All concrete surfaces must be clean, dry, free of voids, protrusions, loose material, laitance, dust, oil, grease and unapproved curing compounds or form release agents. Hydrotech recommends a concrete cure/dry time of 28 days minimum prior to the application of the membrane.

Retrofit/rehab applications require the total removal of the existing waterproofing down to clean, bare concrete.

Joints in concrete block substrates should

be struck flush with the block surface, not tooled or raked.

Any exposed metal surfaces shall be free of paint, oil, rust or any other contaminant.

Wood substrates should be composed of pressure treated or marine grade materials. Creosote treated wood is not acceptable.

#### Priming

MM7800® is a self-priming material and, therefore, a separate primer is not typically needed on new concrete surfaces. For retrofit applications where an existing membrane has been removed or for extremely porous surfaces, it is recommended that an asphalt primer (meeting ASTM D-41) be utilized at a rate of ½ to ¾ gallons per 100 square feet. Allow primer to dry thoroughly before applying membrane.

#### Application

Construction joints, control joints and all cracks greater than 1/16 inch shall be treated with a coat of MM7800 extending 6 inches beyond either side of

TABLE 1

### PHYSICAL PROPERTIES

Property	Typical Value	Test Method
Color	Black	
Elongation	700%	ASTM D-412
Tensile Strength	400 psi	ASTM D-412
Hardness	55	ASTM D-2240, Shore A
Permeance	.25 metric perms	ASTM E-96
Solids Content	65%	
Shelf Life	Indefinite in sealed containers	
Pot Life (upon opening)	2-7 days depending on ambient conditions	
Dry Time	Initial Drying: 12 hours Fully dried/cured: 60 hours	
Environmental Resistance	Excellent resistance to moisture, extreme temperatures	
Chemical Resistance	Excellent resistance to acids, alkalis and salts in soil	

the joint or crack, into which is centered a 6 inch strip of Flex Flash F reinforcing and top coated with a second coat of MM7800. All flashing and detailing work should be completed prior to the application of the membrane in the field.

MM7800 is to be installed as a fabric reinforced assembly for the following applications:

- Over extremely rough concrete surfaces
- Retrofit applications
- Over concrete block (CMU) walls
- Or as otherwise directed by Hydrotech

MM7800 is to be troweled to the concrete surface. A hand-held trowel or paddle is typically used to apply the material to the specified thickness.

For the standard assembly, MM7800 should be applied in one or two coats at a finished rate of 4 gallons per 100 square feet to achieve a thickness of approximately 78 mils.

For the fabric reinforced assembly, apply one coat of MM7800 at a rate of 3 gallons per 100 square feet (approximately 48 mils) to the concrete surface. Embed a layer of Flex Flash F or Flex Flash F-Vertical into the membrane, making sure all edges are overlapped at least 3 inches. Smooth the fabric into the membrane and eliminate any wrinkles. After the first coat has had a chance to set, a second coat of membrane is then applied at a rate of 3 gallons per 100 square feet, fully encapsulating the fabric reinforcing. The total thickness of the membrane should be approximately 96 mils or 6 gallons per 100 square feet.

Allow the membrane to dry/cure prior to the installation of an approved protection board (DuPont™ Styrofoam™ Brand Insulation Boards, Hydroflex 30). The protection course can be spot attached with additional membrane.

#### **Precautions**

Do not use near open flame. Avoid breathing solvent vapors and prolonged contact with skin. Do not take internally. If swallowed, do not induce vomiting. Contact a physician immediately.

Keep out of reach of children. Keep container covered when not in use. Do

not thin. Dispose of in accordance with local, state and federal requirements. User must read container labels and Material Safety Data Sheets for health and safety precautions prior to use.

### **5. Availability and Costs**

#### **Availability**

Through American Hydrotech, Inc. Sales Representatives worldwide.

#### **Costs**

MM7800 is competitively priced. Contact your local representative or Hydrotech directly.

### **6. Guarantees**



Contact American Hydrotech, Inc. for specific warranty information.

### **7. Maintenance**

None required. Damaged material is easily repaired by the removal of the damaged material and coating with new MM7800.

### **8. Technical Service**

Technical support is provided by a trained network of sales representatives and a Technical Service Department.

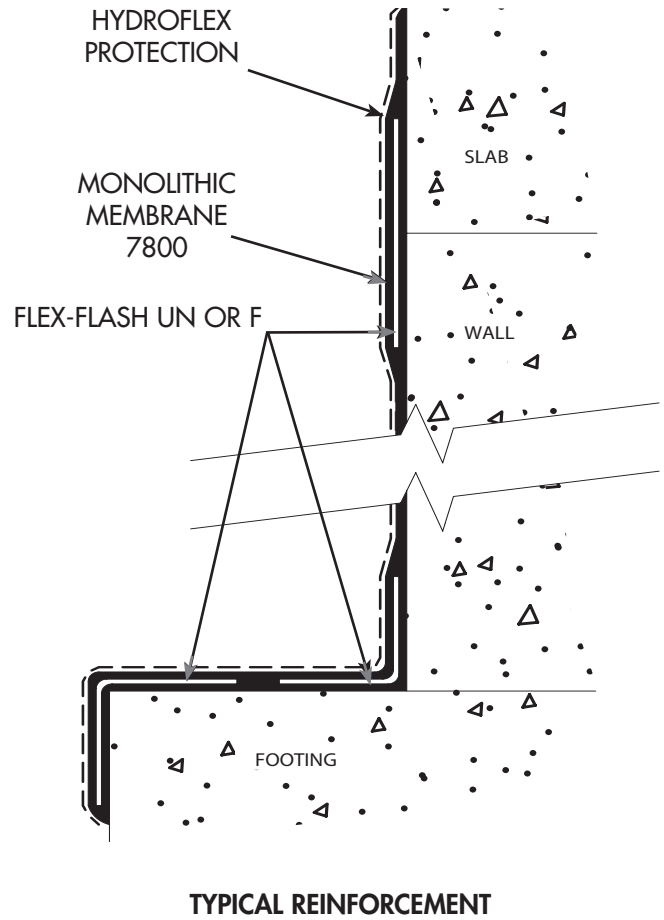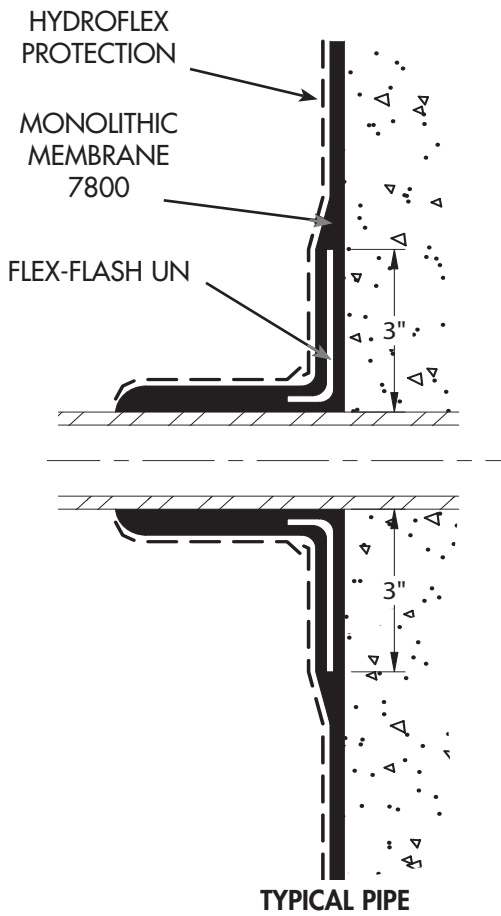

A SIKA COMPANY

© 2021 AMERICAN HYDROTECH INC.

**American Hydrotech, Inc.**  
 541 N Fairbanks Ct., Chicago, Illinois 60611  
 800.877.6125; 312.337.4998  
 312.661.0731 (fax)  
 www.hydrotechusa.com

This information is intended only for general conceptual purposes. It is based on data and knowledge considered to be true and correct. It is offered for the user's consideration, investigation and verification and is not intended to substitute for the advice provided by appropriate professionals. Hydrotech assumes no liability for the use of this information. The determination of the suitability and applicability of this information is the sole responsibility of the user.