

Hydrotech® Hydrodrain® 990

formerly known as Hydrodrain® 990



BUILDING TRUST




GENERAL DESCRIPTION

Hydrodrain 990 is a composite drainage system of a three-dimensional, crush-proof drainage core and a woven filter fabric. The filter fabric is bonded to the top surface of the core dimples, preventing intrusion of the fabric into the flow channels during backfilling. The fabric extends 4" beyond the core and is bonded on one side of the core.

BASIC USE

The Hydrodrain drainage layer is ideal anywhere a subsurface drainage course is required. Typical applications include foundation walls, trench drains, planters, plaza decks and roof assemblies. Hydrodrain must be covered with subsequent overburden within 10-14 days of installation.

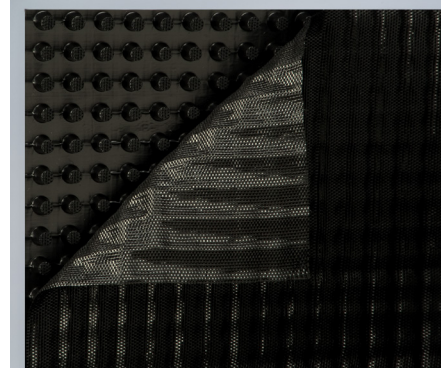

ADVANTAGES

- Reduces hydrostatic pressure on below-grade structures.
- Enhances conventional waterproofing systems by transmitting water into a collection system before it reaches the wall substrate.
- Prevents intrusions of soil, concrete, or grout into the flow channels.
- Materials are resistant to all known naturally occurring earth salts and minerals.

SIZES

The Hydrodrain drainage layer is available in roll form, 48 inches wide by 50 feet long. The geotextile overlaps the drainage core 4 inches on one side. Each roll covers 200 square feet and weighs 52 lb.

TECHNICAL DATA

PROPERTY	TEST METHOD	GEOTEXTILE	RESULTS
THICKNESS	ASTM D1777	--	0.4 in.
COMPRESSIVE STRENGTH	ASTM D1621	--	33,000 psf
FLOW "Q" @ 3600 psf; Hydraulic Gradient = 1	ASTM D4716	--	24 gal. / min. / ft. width
FLOW	ASTM D4491	145 gal. / min. / ft. ²	--
PUNCTURE	ASTM D6241	675 lb.	--
GRAB TENSILE	ASTM D4632	365 x 200 lb.	--
APPARENT OPENING SIZE	ASTM D4751	40 U.S. Sieve	--

LEED® INFORMATION

	Credit 4	Credit 5
Recycled Content (% by weight)	50 (pc)	
Manufacture Location		Apharetta, GA
Extraction/Harvesting Location		Apharetta, GA
VOC Content (g/L)		0

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at usa.sika.com or by calling SIKA's Technical Service Department at 1-800-933-7452. Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.**

Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at <https://usa.sika.com/en/group/SikaCorp/termsandconditions.html> or by calling 1-800-933-7452.